


Xeta13 OEM Module

1.3 GHz Serial Software Defined Industrial Radio

The **Xeta13 OEM Module** is an extremely capable and flexible industrial Frequency Hopping Spread Spectrum (FHSS) and Digital Transmission System (DTS) software defined radio. The module utilizes a XetaWave patented **Dual Decode Digital Architecture™** that offers significant receiver performance.

The **Xeta13** supports multiple modulation schemes and features that can selectively switch the modulation scheme to achieve optimal data throughput given the available channel size and environmental noise.

The **MultiSpeed MultiPoint™** mode enables Endpoints operating at different over-the-air data transfer rates to communicate with an Access Point over the same network. Simultaneous transmissions within a network using the new **XetaMESH** feature increases the aggregate throughput while supporting peer to peer communications.

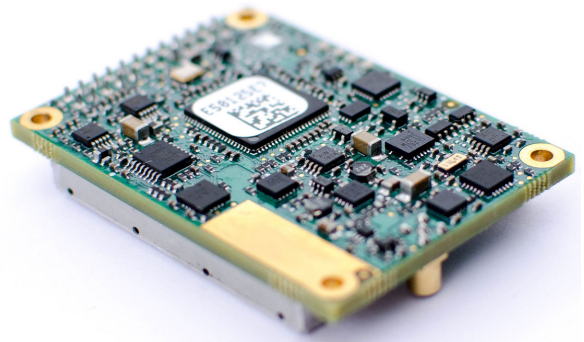

Key Features

High Speed Over-the-air data rates from 10 kbps to 5.3 Mbps plus higher throughput with payload compression and in the **XetaEMP** mode.

Selective Modulation Multiple MSK, FSK, PSK, and QAM modulations.

Dual Mode Frequency hopping and single channel operations.

Adjustable RF Output Power output up to 5 Watt (+37 dBm).

Interchangeable Xeta9, Xeta13, and Xeta24 radio modules are drop in replacements.

Multi-Speed TDMA Offers multiple logical data channels with different speeds within a single radio.

XetaMESH Provides peer to peer communications within a point to multipoint network.

Options Available with TTL or RS232 serial interface and TDMA.

Xeta13 OEM Module Specifications

Transmitter	ISM FHSS	ISM DTS
Frequency Range	1.35 to 1.39 GHz	
Output Power	10 to 5000 mW (10 to 37 dBm)	
Modulation	MSK, 2FSK, BPSK, QSPK, 8PSK, 16PSK, 16QAM, 32QAM, 64QAM	
Data Rate	57 to 5303 kbps	530 to 5303 kbps
Channel Bandwidth	77, 154, 207, 310, 600, 900 & 1200 kHz	600, 900 & 1200 kHz
Frequency Stability	1.0 ppm	
Range	70+ miles	30 miles

Receiver	ISM					
	77 kHz Channel		154 kHz Channel		207 kHz Channel	
Modulation	Sensitivity	Data Rate	Sensitivity	Data Rate	Sensitivity	Data Rate
MSK	-112 dBm	57 kbps	-110 dBm	114 kbps	-109 dBm	153 kbps
	310 kHz Channel		600 kHz Channel		1200 kHz Channel	
MSK	-107 dBm	229 kbps				
BPSK			-98 dBm	530 kbps	-103 dBm	884 kbps
QPSK			-96 dBm	1061 kbps	-99 dBm	1768 kbps
8PSK			-91 dBm	1591 kbps	-92 dBm	2651 kbps
16PSK					-82 dBm	3535 kbps
16QAM			-87 dBm	2121 kbps	-89 dBm	3535 kbps
32QAM			-81 dBm	2651 kbps	-81 dBm	4419 kbps
64 QAM			-76 dBm	3182 kbps	-76 dBm	5303 kbps

900 kHz Channel

Modulation	Sensitivity	Data Rate
2FSK	-100 dBm	663 kbps

Xeta13 OEM Module Specifications

Power

Transmit Current	< 2.3 A @ +12.0 Vdc
Receive Current	< 70 mA @ +12.0 Vdc
Idle Current	< 3 mA @ +12.0 Vdc

Environmental/Physical

Op. Temperature	-40°C to +75°C
Humidity	95% @ +40°C non-condensing
Safety	UL Class 1 Div 2
Dimensions (LxWxH)	2.0" x 1.4" x 0.37"
Weight	30 grams

Interfaces

Connector	24-pin Samtec Header	Power	+12.0 Vdc (TTL)
Data	Serial TTL or RS232		+15.0 to 30.0 Vdc (RS232)
Data Interface Rate	Up to 2 Mbps (TTL)	Control	Serial TTL
	Up to 921.6 kbps (RS232)	Control Interface Rate	115.2 kbps
RF Connector	MMCX / 50 Ohms		

Functionality

Operating Modes	Point to Point, Point to MultiPoint, Enhanced MultiPoint, Peer to Peer, Mesh
Roles	Access Point, Endpoint, Repeater
Error Handling	CRC, FEC, Retransmit on error
Error Correction	Golay, Small Block, Reed-Solomon
Data Encryption	128 & 256-bit AES Payload Data Encryption
RF Encryption	128-bit AES RF Overhead Encryption
Hop Patterns	10 Pseudo Random, 1 Pseudo Random Based on Network ID, & 1 Secure
Secure Hop Pattern	128-bit AES Hop Pattern Determination
Repeater	Store-and-forward
MultiMaster	Synchronization of Collocated Access Points or Multiple Access Points within a Network
MultiSpeed	Up to 4 Data Rates within the Same Channel Bandwidth
Diagnostics	Network Scan, RF Ping, RF Throughput, RF Statistics

Xeta13 OEM Module Specifications

Ordering

XETA13-TORA	Board level OEM, TTL interface
XETA13-RORA	Board level OEM, RS232 interface
XETA13-TORA-TDMA	Board level OEM, TTL interface, TDMA